

NTK

Multi Award Winning Class A Dual 1" Condenser Microphone

RØDE[®]

MICROPHONES




Features

- Large 1" (25mm) capsule with gold plated diaphragm
- Class "A" valve circuitry
- Hand selected and graded 6922 twin-triode valve
- Dedicated power supply
- Internal capsule shock mounting
- High level of RF rejection
- Ultra low noise
- Wide dynamic range
- High strength heat treated steel mesh head
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

Acoustic Principle	Pressure gradient	Directional Pattern	Cardioid
Frequency Range	20Hz ~ 20,000Hz	Sensitivity	-38dB ±2dB re 1V/Pa (12mV @ 94 dB SPL) @ 1kHz
Nominal Impedence	200Ω	Equivalent Noise	12dBA SPL (A - weighted per IEC651)
Maximum Output	+29dBu (@ 1% THD into 1kΩ)	Dynamic Range	>147dB (per IEC651)
Maximum SPL	>158dB (@ 1kHz, 1% THD into 1kΩ load)	Signal/Noise	>82dB SPL (A - weighted per IEC651)
Power Req.	Dedicated Power Supply (100 ~ 120V/200 ~ 240V, 50/60 Hz)	Dimensions	Length - 208mm Diameter - 55mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	7.08kg
Net Weight	760g		

Frequency Response

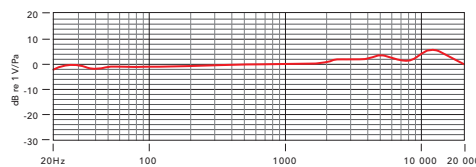

Polar Pattern



Included Accessories

- RM2 stand mount
- RC2 case
- Transformer and lead



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071