

## MOLDED Y/C CABLE ASSEMBLY WITH 4-PIN MINI DIN CONNECTORS



Part No.5139  
ASSEMBLY

Part No.	5139-03	5139-06	5139-12	5139-20	5139-30	5139-50	5139-75	5139-100
Length ( m )	0.9m ( 3 Ft )	1.8m ( 6 Ft )	3.6m ( 12 Ft )	6.1m ( 20 Ft )	9.1m ( 30 Ft )	15.2m ( 50 Ft )	22.8m ( 75 Ft )	30.5m ( 100 Ft )

## MONITOR CABLE




Specifically designed as a miniature video monitor cable, it can be easily connected to a rectangular 8-pin connector.

Part No.2326

### CABLE SPECIFICATIONS

Part No.	2326	
Core Configuration	4x50Ω Coax.	
Conductor Size	0.047mm <sup>2</sup> (#32AWG)	
Ov. Jacket	Material	Flexible PVC
	Ov. Dia . (mm)	6.0φ(0.236")
	Colour	Dark Gray
Roll Size	200m (656Ft)	
Weight per 200m (656Ft) Roll	8.3kg	

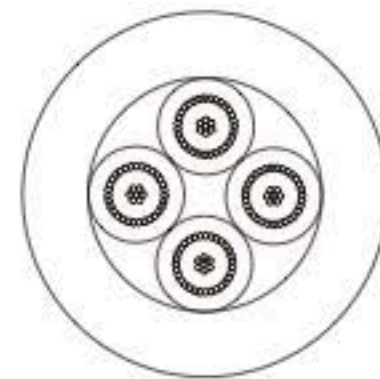

### ELECTRICAL & MECHANICAL CHARACTERISTICS

DC Resistance at 20°C	Inner Cond.	0.4Ω/m (0.122Ω/Ft)
	Shield	0.079Ω/m (0.024Ω/Ft)
Capacitance at 1kHz, 20°C	102pF/m (31.1pF/ Ft)	
Characteristic Impedance at 10MHz	50Ω±5%	
Attenuation at 10MHz	0.2dB/m ( 0.061 dB /Ft )	
Velocity Ratio	0.63	
Electromagnetic Noise*	0.1mV Max .	
Voltage Breakdown	Must withstand at DC 500V/15sec .	
Insulation Resistance	10 <sup>4</sup> MΩ · m Min . at DC 500V , 20°C	
Flex Life*	6,500 cycles	
Tensile Strength	294 N	
Emigration	Non-Emigrant to ABS resin	
Applicable Temperature	-20°C~+70°C (-4°F~+158°F)	

\* Using standard testing method of Mogami Wire & Cable Corp .

