

DT 280 / DT 290

Headsets with dynamic Microphone



FEATURES

- Closed headphone
- Good ambient noise attenuation
- Neodymium magnet system for perfect reproduction
- Soft, circumaural ear pads
- Single-sided, plug-in type connecting cable (delivery does not include the connecting cable)
- Flexible, pivotable gooseneck for optimal positioning with elasticated microphone suspension
- DT 280 single-sided version

APPLICATIONS

The lightweight, closed headsets DT 280 and DT 290 suit ideally for broadcasting applications.

The headphone is featuring an efficient neodymium magnet system, a very high reproduction precision and a balanced sound. Another special feature is the wide transmission range of 10 - 30,000 Hz. The headsets come with 80 Ω or 250 Ω systems.

The soft circumaural earcups and the fully adjustable padded headband are extremely comfortable. The dynamic microphone can be optimally positioned with the flexible gooseneck. The hyper-cardioid polar pattern guarantees an extremely high-gain-before feedback and noise cancellation. The microphone holder is rotatable so that the microphone can be worn on the left or right side.

The cables to the ear cups and the microphone run safely in the headband. The connecting cable is single-sided, plug-in type with a golden combi 1/4"/mini jack plug. All parts such as ear pads, headband and gooseneck microphone are easy to replace.

VERSIONS

DT 290 MK II	Headset, 200/80 Ω	Order # 701.610
DT 290 MK II	same as above, but 200/250 Ω	Order # 701.629
DT 280 MK II	Single-sided version, 200/80 Ω	Order # 701.599
DT 280 MK II	same as above, but 200/250 Ω	Order # 701.602

OPTIONAL ACCESSORIES

K 190.00	Bare-ended straight cable, 1.5 m long	Order # 431.575
K 190.28	Straight cable with 4-pin XLR-socket, 1.50 m long	Order # 445.304
K 190.40	Straight cable with 3-pin XLR-plug and 1/4" jack (6.35 mm), 1.50 m long	Order # 445.894
K 190.41	Straight cable with 5-pin XLR-plug, 1.50 m long	Order # 445.312
WS 97 AZ	Wind / pop shield, charcoal-grey.	Order # 465.313

SPARE PARTS

EDT 250 V	Ear pads, velours, circumaural	Order # 942.704
EDT 250 S	Ear pads, soft PVC, circumaural	Order # 943.549

DT 280 / DT 290

TECHNICAL SPECIFICATIONS

Headphone

Transducer principle	Dynamic
Operating principle	Closed
Transmission range	10 - 30,000 Hz
Nominal impedance	80 Ω or 250 Ω / system
Nominal SPL at 1 kHz	100 dB SPL at 1 mW = 0.28 V to 80 Ω < 0.2%
T.H.D.	< 0.2%
Nominal power rating	100 mW = 120 dB = 2.8 V to 80 Ω
Ambient noise insulation	approx. 16 dBA
Average pressure on ears	4.5 N
Weight without cable	170 g (DT 280), 240 g (DT 290)

Microphone DT 280/290



Transducer principle	Dynamic
Frequency response	40 - 12,000 Hz
Polar pattern	Hypercardioid
Output voltage at a distance of 5 cm	approx. 1.3 mV/Pa
Nominal impedance	200 Ω
Nominal output impedance	> 1000 Ω
Outer diameter	approx. 23.2 mm

Microphone DT 290 V.11


Transducer principle	Dynamic
Frequency response	40 - 12,000 Hz
Polar pattern	Hypercardioid
Output voltage at a distance of 5 cm	approx. 1.5 V/Pa
Nominal impedance	200 Ω
Current consumption	8 - 56 mA
Outer diameter	approx. 23.2 mm

WIRING DIAGRAMS

Positive pressure produces positive voltage on connection 6 of the headphone socket.

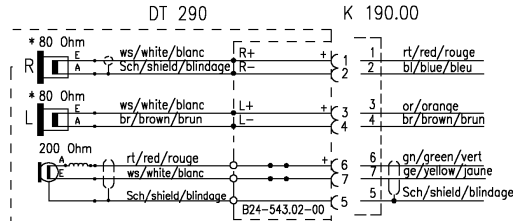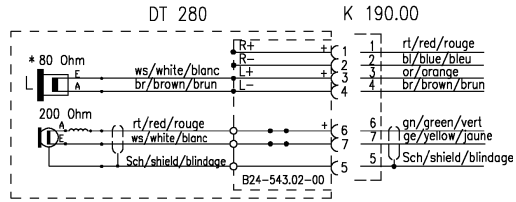

* Sonderausführung 250 Ohm System lieferbar
* Special model 250 ohm system available

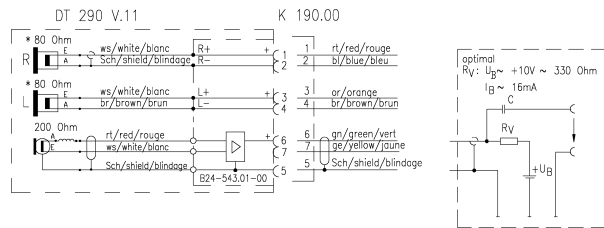

FREQUENCY RESPONSE & POLAR PATTERN

This polar pattern and frequency response curve (measuring tolerance ± 2.5 dB) correspond to a typical production sample for this microphone.

Frequency response curve ± 2.5 dB

0 dB = 1.3 mV / Pa

