


Broadcaster

Precision 1" Broadcast Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664

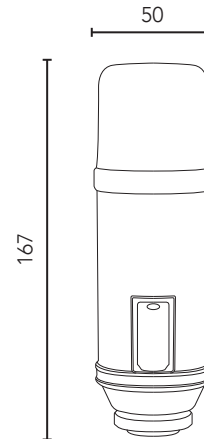

Features


- HF2 1" capsule with gold plated diaphragm
- On-Air indicator LED
- Ultra low noise
- Voice tailored low-cut feature
- Internal pop-filter to reduce plosives
- Rugged stainless steel body
- Designed and manufactured in Australia
- Full 10 year warranty*

Specifications


| | |
|---------------------|--|
| Acoustic Principle | Pressure gradient |
| Directional Pattern | Cardioid - end address |
| Frequency Range | 20 Hz-20 kHz |
| Sensitivity | -34 dB re 1 Volt/Pascal (20 mV @ 94 dB SPL) +/- 2 dB @ 1kHz |
| Output Impedance | 40Ω |
| Dimensions | Length - 167mm (6.574") Diameter - 50mm (1.968") |
| Output Connection | 3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) |
| Shipping Weight | 840g |
| Net Weight | 577g |



Polar Pattern

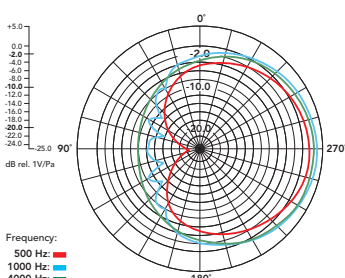

Frequency Response

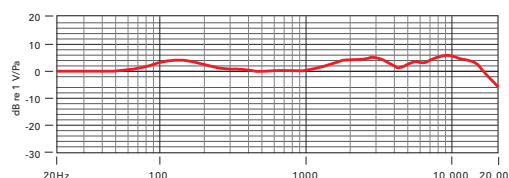

Notes

*Microphone must be registered at www.rodemic.com to activate extended warranty.

RØDE
MICROPHONES